




## SPD Plug-in

RS485 SPD for Single Phase Inverters  
with HD-Wave Technology

SE-RS485-SPD2-K2

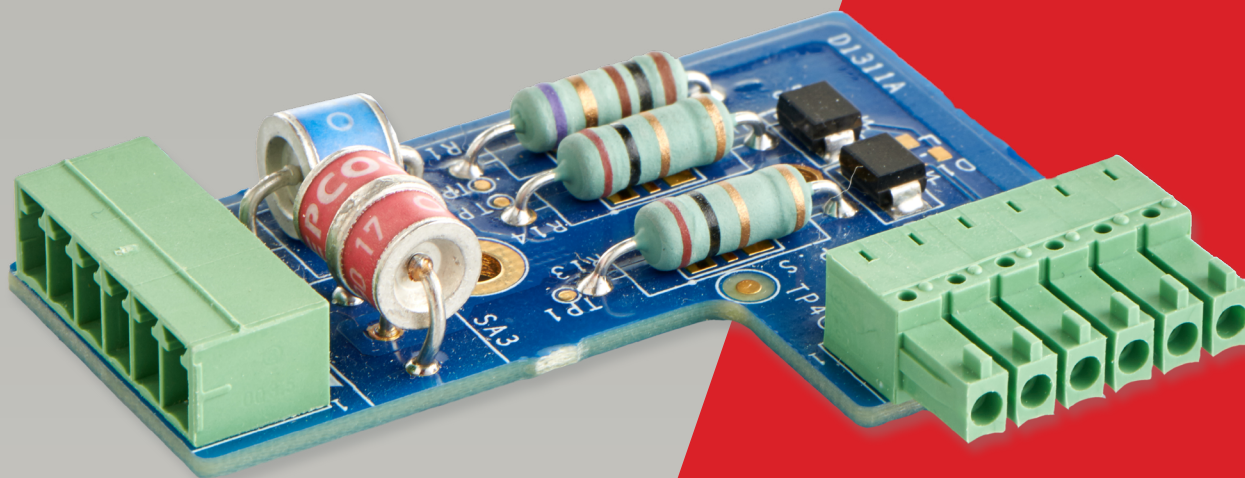

COMMUNICATION

### Protecting your RS485 Communication Lines

- Protects the RS485 transceiver from electrical surges, such as lightning
- Easy connection to the RS485 terminal block in the inverter
- Compatible with all single phase inverters with HD-Wave technology
- Can be added to existing installations without having to redo the RS485 wiring


# SPD Plug-in

RS485 SPD for Single Phase Inverters with HD-Wave Technology  
SE-RS485-SPD2-K2

COMPATIBLE INVERTERS	SExxxxH-XXXXXNXXX (INVERTER WITH A DISPLAY)	
PART NUMBER	SEXxxxH	
FUNCTIONAL		
Surge Protection Device configuration	1-pair + Shielded	
Nominal line voltage (Un)	12	V
Max. DC operating voltage (Uc)	15	V
Max. Load current (IL)	300	mA
Max. frequency (f max)	>3	MHz
Insertion loss	<1	db
Nominal discharge current (In) 8/20µs Test x 10 - C2 Category	5	kA
Max. discharge current - max. (Imax) withstand @ 8/20 µs by pole	15	kA
Impulse current (Iimp) 2 x 10/350µs Test - D1 Category	1	kA
Protection level (Up)	70	V
INSTALLATION SPECIFICATIONS		
Dimensions	91 x 37 x 15	mm
Connector type/wire cross section	Screw terminal / 0.2-1.5	AWG
Operating temperature	-40 to +85 -40 to +185	°C °F
Protection rating	IP20 / IP65 inside the inverter	
STANDARDS COMPLIANCE		
EMD	IEC 61643-21 / EN 61643-21	

\* Product is shipped nine devices to a box

## Protecting your RS485 Communication Line

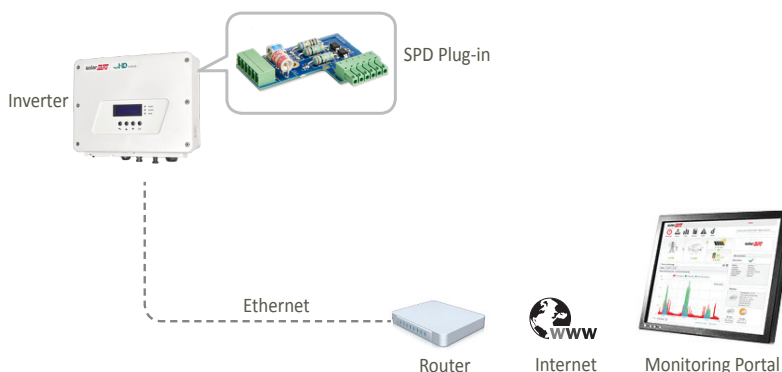

**RoHS CE**